DID YOU KNOW?

about our...



NEW PRODUCT

Standard Hollow Wall Anchor


STANDARD HOLLOW WALL ANCHOR
ZINC PLATED (ROHS COMPLIANT) / HEC CARBON STEEL


Part	QFind	Size	Dia Ø D_1 (mm)	Body Length L_1 (mm)	Total Length L_2 (mm)	Wall Thickness (mm)	Clearance hole diameter D_2 (mm)	Pack Qty
MWHDZPCM040030	**MWH100**	M4	4	23.5	30	0 - 4	8	100
MWHDZPCM040641	**MWH101**	M4	4	35.0	41	4 - 9	8	100
MWHDZPCM041147	**MWH102**	M4	4	40.0	47	9 - 15	8	100
MWHDZPCM041753	**MWH103**	M4	4	46.0	53	15 - 21	8	100
MWHDZPCM043167	**MWH104**	M4	4	60.0	67	30 - 38	8	100
MWHDZPCM050546	**MWH105**	M5	5	37.0	46	5 - 13	10	50
MWHDZPCM050759	**MWH106**	M5	5	50.0	59	5 - 17	10	50
MWHDZPCM060546	**MWH107**	M6	6	37.0	46	4 - 13	11	50
MWHDZPCM060759	**MWH108**	M6	6	50.0	59	5 - 18	11	50





Anti-rotation barbs

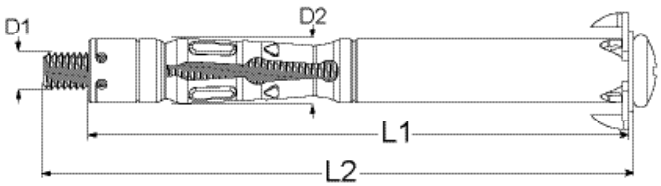



All metal (light duty) cavity fixing for plasterboard and other hollow wall materials up to 38mm in thickness.

Features

- Combination Drive: Philips/Slot
- Cavity Fixing: Plasterboard and other hollow wall materials
- Barbs: Anti-rotational spikes built onto the flange to prevent the anchor from spinning

CONXTRUCT®

1830131DYK

Bolt Tension | Anti-Vibration | Product Reliability | Traceability


DID YOU KNOW?

Standard Hollow Wall Anchor



NEW PRODUCT


Installation

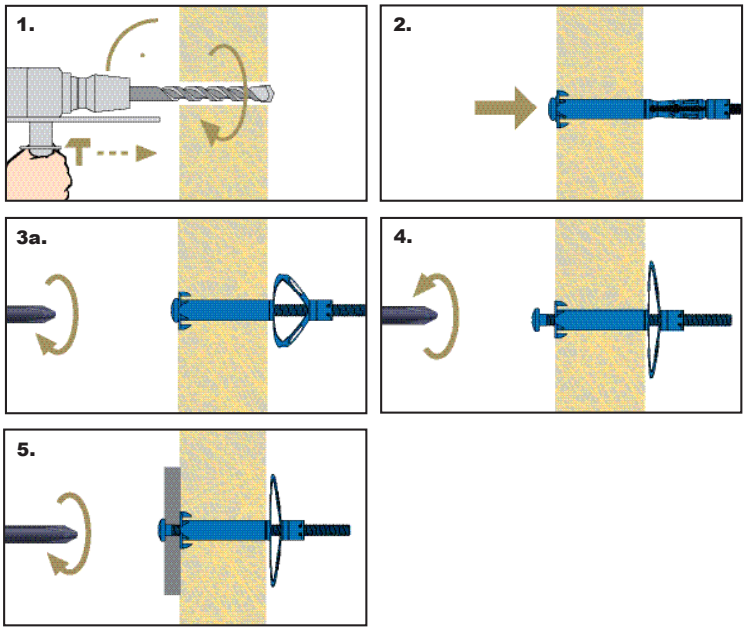

Recommended Setting Tool

Hollow Wall Anchor Tool	
Part	**Description**
MATWHR	M4–M6 Ratchet Style



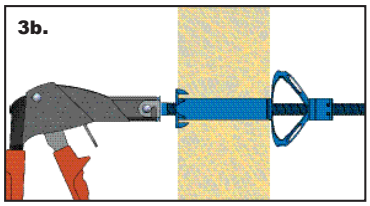

Installation Guide

1. Drill a hole to recommended clearance through the base material.
2. Insert the anchor and tap the head until the barbs are embedded in the base material and the head is flush with the surface.

3a. Using a screwdriver, screw in the clockwise direction. The effort required to turn the screw will increase as the legs of the anchor collapse behind the wall. Tighten until firm resistance is felt.

3b. For faster setting, back the screw head out 2–3 mm. Fit the tool over the head of the screw then squeeze the tool to pull up the legs of the anchor in the wall cavity.

4. Remove the screw.
5. Place the screw back into the anchor through a fixture with a clearance. Tighten the screw until the fixture is secure.

1830131DYK