# DID YOU KNOW?

about our...




NEW PRODUCT


# Metal SDS Flanged Hex Head

## METAL SDS FLANGED HEX HEAD
**550 STAINLESS / HEC**

| Part | QFind | Size | Length | Thread Length | Head Height | Head ø | Drill Point | Drive Size |
|---|---|---|---|---|---|---|---|---|
| | | Ø | L (mm) | T (mm) | H (mm) | D (mm) | DP (mm) | AF (mm) |
| T55MSFH1016016 | **QT141** | #10–16 | 16 | 10 | 4.5 | 11.0 | 6.2 | 5/16 |
| T55MSFH1016020 | **QT142** | #10–16 | 20 | 14 | 4.5 | 11.0 | 6.2 | 5/16 |
| T55MSFH1016025 | **QT143** | #10–16 | 25 | 19 | 4.5 | 11.0 | 6.2 | 5/16 |
| T55MSFH1214025 | **QT144** | #12–14 | 25 | 18 | 5.8 | 14.5 | 7.4 | 5/16 |
| T55MSFH1214035 | **QT145** | #12–14 | 35 | 28 | 5.8 | 14.5 | 7.4 | 5/16 |
| T55MSFH1214045 | **QT146** | #12–14 | 45 | 38 | 5.8 | 14.5 | 7.4 | 5/16 |

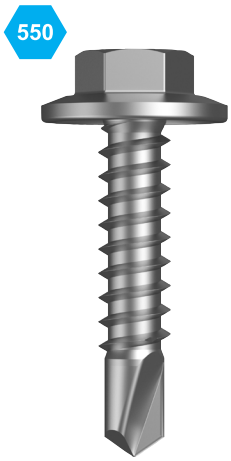


### APPLICATIONS
- Fastening exterior decorative steel sheets to steel channels
- Replaces spot welding of stainless steel material
- Stainless steel facades

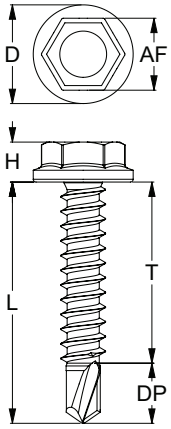


### FEATURES
- Martensitic YUS 550 stainless steel for excellent resistance to heat and corrosion
- Steel specifically designed with high hardness suitable for self-drilling screws
- Similar corrosion resistance to 304 stainless steel

DRILLX®

You can download this Test Certificate and/or Report from our website:

**hobson.com.au**

Disclaimer: while every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees disclaim all liability in respect to anything or the consequences of anything done or omitted regarding the whole or any part of this document. HEC product marking is the manufacturing mark of Hobson Engineering. HEC is a registered trademark of Hobson Engineering.